



BATTERYMANAGEMENT.NET
USER GUIDE



BATTERYMANAGEMENT.NET

USER GUIDE

TABLE OF CONTENTS


- 3: **INTRODUCTION**
BATTERYMANAGEMENT.NET IN A NUTSHELL
PRO-ACTIVE DATA DRIVEN DECISIONS
- 4: **HOW THE EGO! UPLOADS TO THE WEBSITE**
- 5: **HOW BATTERYMANAGEMENT.NET IS ORGANISED**
USER PERMISSIONS
- 6: **WEBSITE SETUP & ADMINISTRATION**
CREATING A SITE:
CREATING A USER:
- 8: **HOW TO VIEW THE EGO! DATA**
- 10: **APPENDIX A**

LOGIN DETAILS

USERNAME:

PASSWORD:

INTRODUCTION

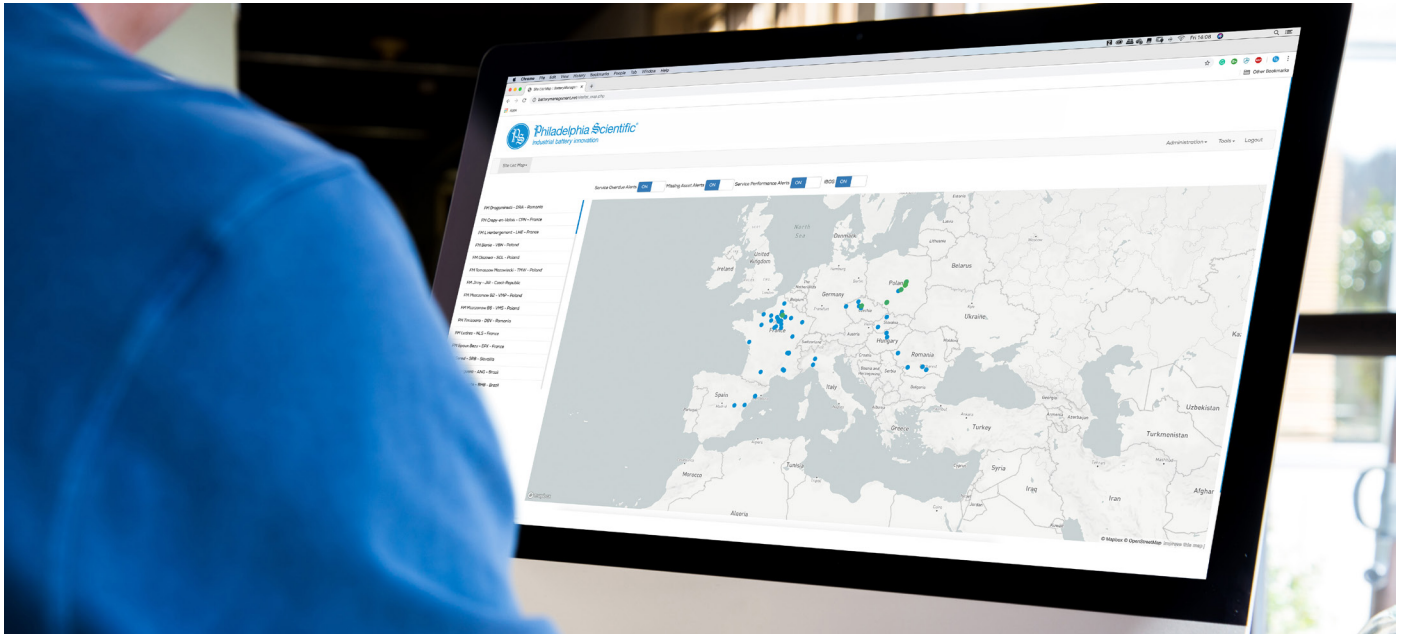


PRO-ACTIVE DATA DRIVEN DECISIONS

- Enables a comparison of the battery use to the design expectations.
- Offers battery replacement date predictions.
- Real-time email alerts can be configured to each site's requirements across multiple parameters (with CloudLink and an Internet connection).
- Multiple user profiles can be provided depending on needs and access permissions. From the administrator who has full access, through management tiers, to a user who can only view reports.
- Multi-language reports are available in English, Korean, Japanese, Spanish, French, German, Dutch, Italian, Portuguese, Serbian, Slovak, Czech, Hungarian.
- Custom website branding for customers.
- The batterymanagement.net API can be integrated into many third party online reports such as forklift management systems.
- When using the iTAG system and reports, batterymanagement.net provides in-depth battery asset records, including condition histories and service records which complement the eGO!c reports.
- The eGO!c has the most comprehensive battery data of any user orientated battery monitoring device.

HOW THE EGO! UPLOADS TO THE WEBSITE

MANUAL UPLOAD

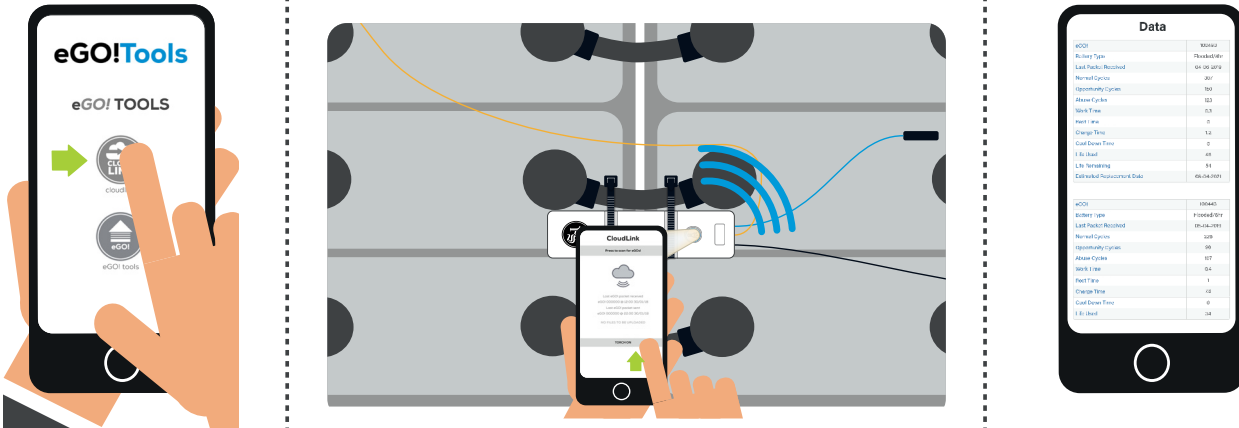



The diagram illustrates the manual upload process in three steps. Step 1 shows a hand holding a smartphone with the eGO!Tools app open, where the 'CloudLink' feature is highlighted. Step 2 shows a hand holding a smartphone with the CloudLink app open, positioned next to a battery unit with a CloudLink device attached. Step 3 shows a smartphone displaying a 'Data' screen with two tables of battery performance metrics.

Data	
EGO!	100000
Battery Type	Flashed 60V
Last Status Received	10/10/2019
Normal Cycles	207
Abnormal Cycles	500
Power Cycles	123
Spark Free	157
Next Fire	1
Charge Time	1.12
Last Down Time	0
U to Start	05
U to Stop	01
Estimated Run/Connect Date	06/04/2019




Data	
EGO!	100000
Battery Type	Flashed 60V
Last Status Received	10/10/2019
Normal Cycles	108
Abnormal Cycles	38
Power Cycles	87
Spark Free	54
Next Fire	1
Charge Time	0.82
Last Down Time	0
U to Start	04

1

 + 


AN UPLOAD CAN BE TRIGGERED USING THE CLOUDLINK FEATURE IN THE EGO!TOOLS APP. USING THE TORCH BUTTON, HOLD THE TORCH ON THE EGO!C, AND A BLUE AND AMBER SOLID LIGHT WILL APPEAR. ONCE THIS APPEARS, TAKE THE TORCH OFF IMMEDIATELY.

2

 →  / 


THE EGO!C WILL START FLASHING BLUE FOR 20 SECONDS WHEN AN UPLOAD IS TRIGGERED. WHEN THE UPLOAD IS COMPLETE IT WILL RETURN TO ITS NORMAL STATE OF FLASHING GREEN (OR RED IF THE BATTERY NEEDS WATER). YOU CAN THEN VIEW THE EGO! DATA IN THE APP.

AUTOMATIC UPLOAD

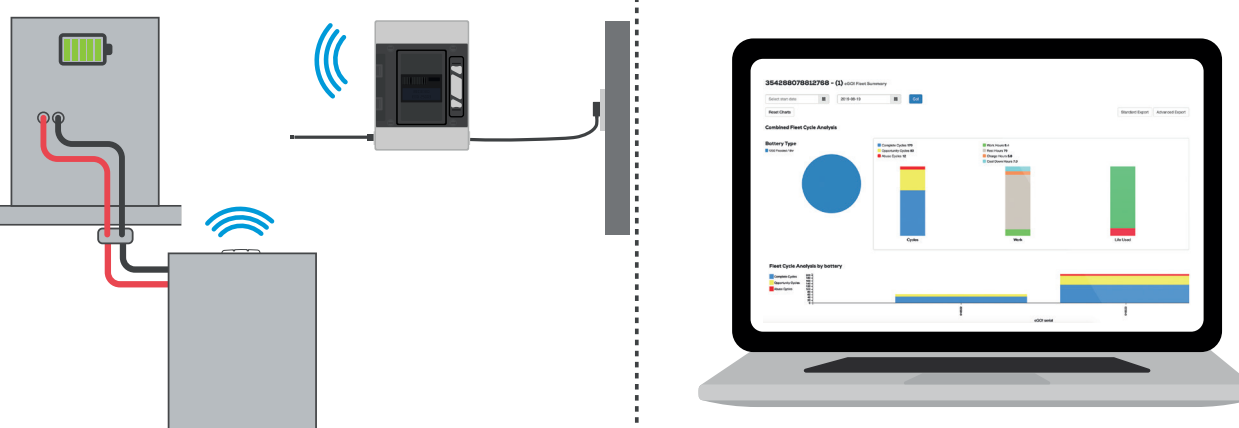



The diagram illustrates the automatic upload process in two steps. Step 1 shows a battery unit connected to a CloudLink device, which is connected to a laptop. Step 2 shows a laptop displaying a '35488078012758 - EGO! eGO! eGO! eGO!' screen with a 'Continued Fleet Cycle Analysis' chart and a 'Fleet Cycle Analysis by Battery' chart.

1



WHEN THE BATTERY IS FULLY CHARGED, THE EGO!C WILL TRIGGER AN UPLOAD AND WILL START FLASHING BLUE FOR 20 SECONDS. IF THERE IS AN INTERNET CONNECTED CLOUDLINK INSTALLED IN THE BATTERY ROOM, IT WILL SEND THE DATA TO BATTERYMANAGEMENT.NET.

2

 / 

WHEN THE UPLOAD IS COMPLETE THE EGO!C WILL RETURN TO ITS NORMAL STATE OF FLASHING GREEN (OR RED IF THE BATTERY NEEDS WATER).

HOW BATTERYMANAGEMENT.NET IS ORGANISED



ORGANISATION: An organisation is typically a battery company, rental company, or truck company that serves many sites, however it may also be a large logistics firm or retail organisation that has to manage many sites across a country or region.

SITE: A site is a place where the eGOs being managed are located. This is normally a warehouse or production facility.

EGO!: The eGOs are ‘assets’ that are assigned to a site in batterymanagement.net

USER PERMISSIONS


The table below shows those who have access to functions (✓) and those who don't (✗)

FUNCTION		ADMINISTRATOR	OPS. MANAGER	SITE/DEPOT MANAGER	USER
SITE	Create	✓	✓	✗	✗
	Edit	✓	✓	✗	✗
	Delete	✓	✓	✗	✗
	View	✓	✓	✓	✓
USER	Create	✓	✓	✗	✗
	Edit	✓	✓	✓	✗
	Delete	✓	✓	✓	✗
	View	✓	✓	✓	✓
EGO / ASSET	Create	✓	✓	✓	✗
	Edit	✓	✓	✓	✗
	Delete	✓	✓	✓	✗
	View	✓	✓	✓	✓

WEBSITE SETUP & ADMINISTRATION

CREATING A SITE:


1. Log into <https://www.batterymanagement.net>
2. Go to the Administration drop-down menu and select 'Create Site':

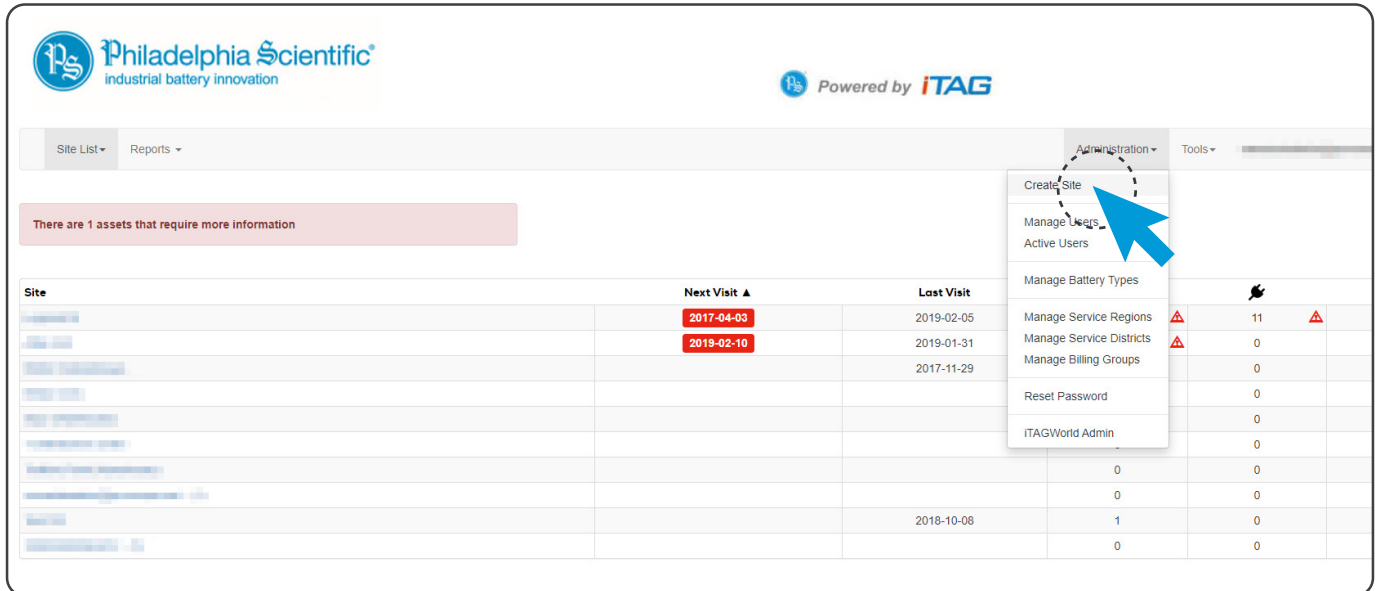

3. Fill in the necessary information and click on 'Create Site'.

CREATING A USER:

4. Log into <https://www.batterymanagement.net>
5. Go to the Administration drop-down menu and select 'manage Users'

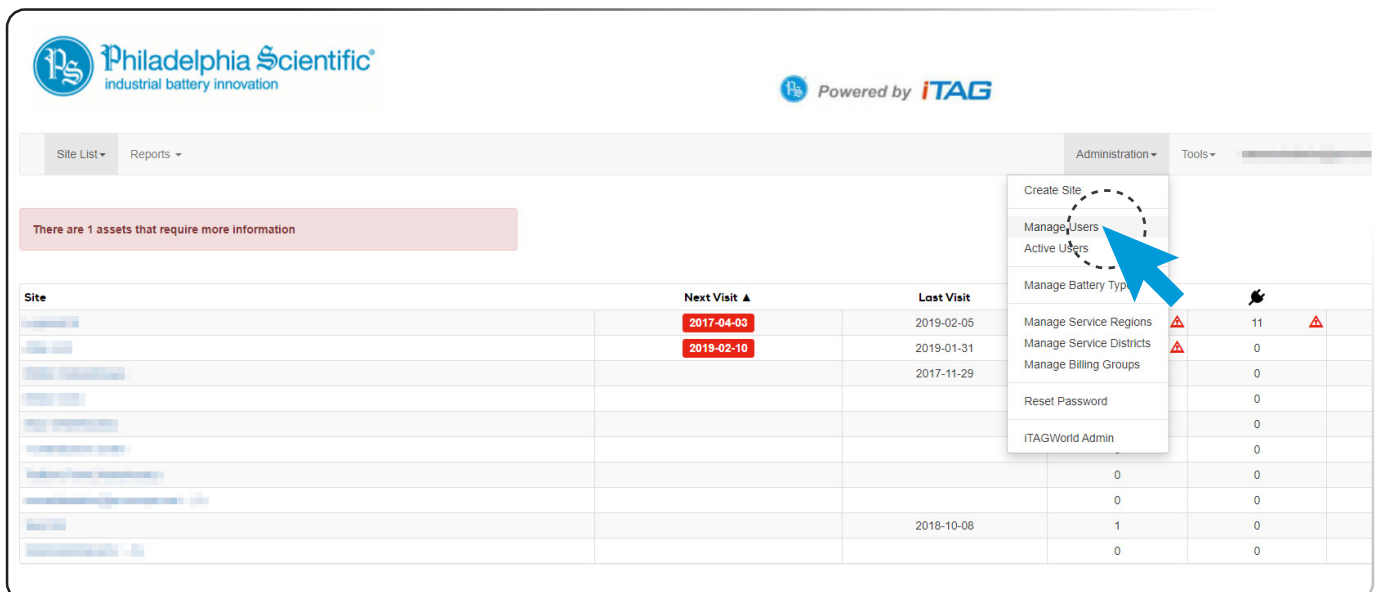

6. Click on the 'create user' button on the right hand side:

Philadelphia Scientific®
industrial battery innovation

Powered by ITAG

Site List Manage Users

Org Admin Logout


Manage Users

Create New User

Search:

Full Name	User name	User Type	Service Region
[Redacted]	[Redacted]	User	
[Redacted]	[Redacted]	User	
[Redacted]	[Redacted]	Org Manager	
[Redacted]	[Redacted]	Org Admin	
[Redacted]	[Redacted]	User	
[Redacted]	[Redacted]	Org Manager	

7. Enter the required information and click on 'Create New User'

 **Philadelphia Scientific**
industrial battery innovation

[Site List](#) [Manage Users](#) [Create User Sites](#)

Create User

User name

Password

Full Name

Company Name

Address

City

State

Contact Work Phone

Contact Mobile Phone

Accounting Code

User Type

Service Region

Service District

Temperature Units

Language

Permissions

Replace iTag

☐ No

Mobile App touch to Select

☐ No

eGO Upload

☐ No

eGO Asset Data

☐ No

eGO Advanced Data View

☐ No

Create New User

8. On the following screen select the sites that your user should have access to: click on 'Save User Sites'.

Philadelphia Scientific®

industrial battery innovation

Powered by

ITAG

Site List

Manage Users

Create User Sites

Org Admin

Logout

Create User Sites

☒ Deselect All Sites

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

☒ [Site Name]

Save User Sites

View the site tutorial here: <https://youtu.be/f6QaLfmXADQ>

View the user tutorial here: <https://youtu.be/5ALV35u-sbo>


HOW TO VIEW THE EGO! DATA

PLEASE NOTE: You need to trigger an eGO!c data upload to batterymanagement.net




STEP ONE:

Click on the message at the top of the screen regarding assets requiring more information.

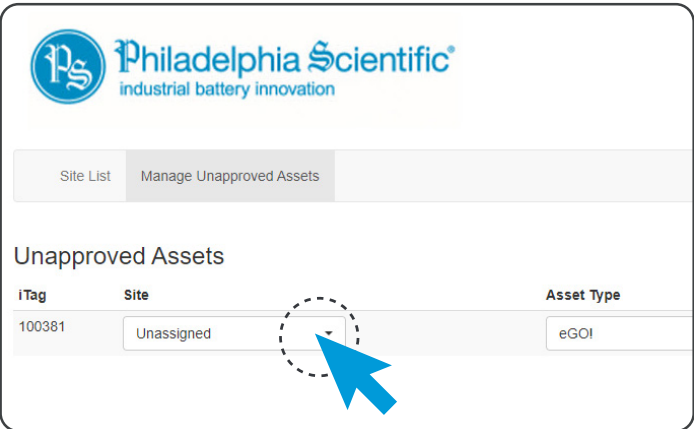

STEP TWO:

You will then be presented with a list of unassigned assets. Select the correct site from the drop-down list and save.

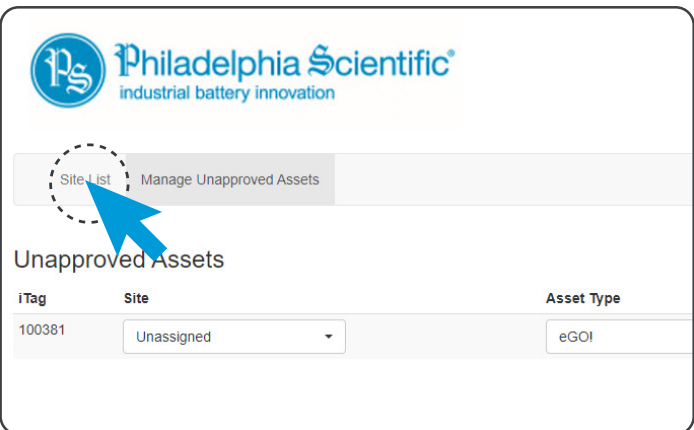


STEP THREE:

Once all assets are assigned click the site list from the menu.




STEP FOUR:

Select the site which you would like to see the information for.

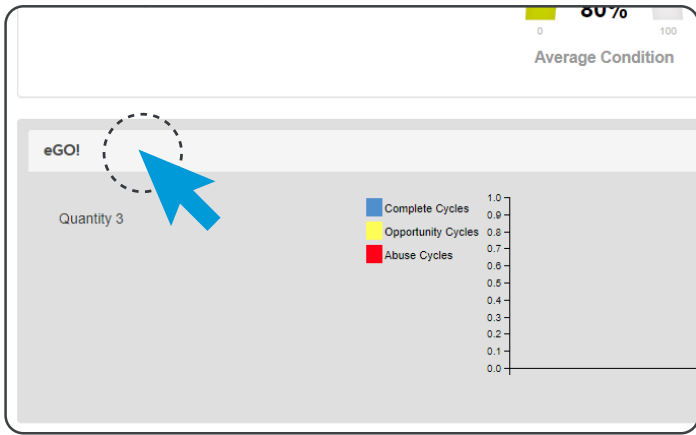


STEP FIVE:


Click on the eGO! section on the user interface.

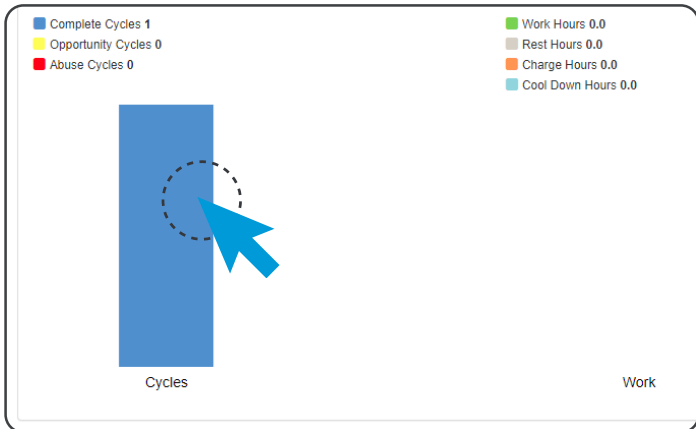


STEP SIX:

Click on the section of information you'd like to look into further.


Philadelphia Scientific
 industrial battery innovation


 Powered by **ITAG**

[Site List](#)
[Site Summary](#)
[eGO! Fleet Summary](#)
[eGO!](#)


eGO!3 044360 **Date** 2017-11-30 16:26:58 **Battery Type:** 1250 Flooded / 8hr **Design life (cycles):** 1250

eGO! information		
Description	unknown ego	Location
Capacity		infofield 1
notes		infofield 2
Reference Number	044360	infofield 3
Date of Install	0000-00-00	infofield 4
Date of Manufacture		infofield 5
Battery Type	1250 Flooded / 8hr	infofield 6
Voltage	24V	

Life Summary	
Estimated Cycles	1
Opportunity Charge	--
Abuse	--
Combined Cycles	1
Life Used	
Est. Replacement	2022-11-29


Data at last download
[Reset Charts](#)
☐ OFF [Show Predicted](#)

THE EGO!C DATA DASHBOARD

You'll now be on the eGO!C dashboard page for an individual eGO!c. This will give you a breakdown of all the information recorded and uploaded to the batterymangement.net hub.

FOR FURTHER INFORMATION ON THE INFORMATION RECORDED BY THE EGO!C, PLEASE SEE APPENDIX A

APPENDIX A

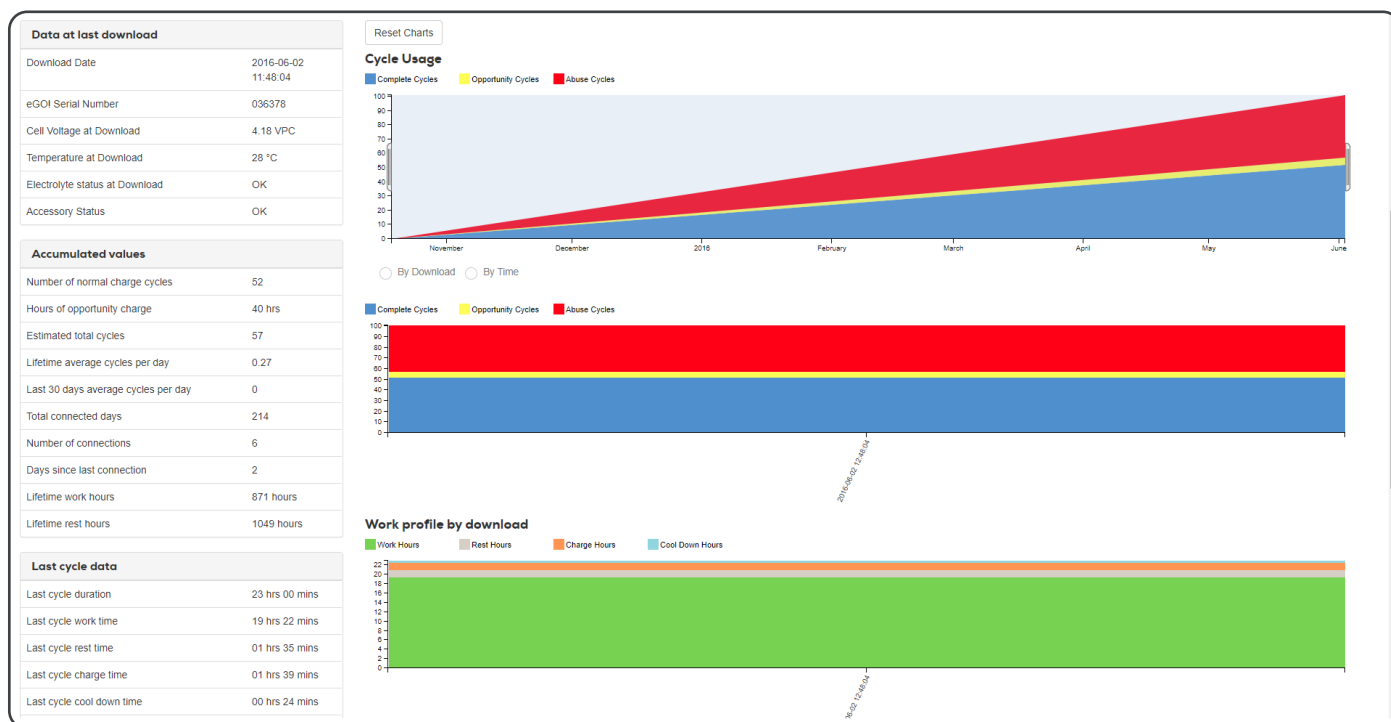

DATA POINTS AND RECORDED METRICS

The eGO!c records over 256,000 data samples, across 28 fields, covering 12 separate performance indicators and features an integrated electrolyte indicator, making the eGO!c an all-encompassing intelligence system that delivers the data that is locked away within your battery. The data is automatically captured and uploaded via our CloudLink gateway, giving you a fully integrated and seamless feedback loop. It tracks and records the following metrics which are uploaded to batterymanagement.net.

Download date: Date of download.

eGO!c Serial number: Serial number issued by PS identifying the eGO!c This is located on top of the eGO!c.

Cell voltage at download: This is the average 'volts per cell' of the battery.

Temperature download: Specific temperature at download.

Electrolyte status at download: OK = electrolyte level is correct.
Fill soon = electrolyte level is getting low.
Fill now = electrolyte level is low, battery needs filling.

Accessory status: There are no accessories available for the eGO!c so you will see 'OK'.

Number of normal charge cycles: The number of times the battery is discharged and then charged with a normal termination.

Hours of opportunity charge: Quantity of hours of charge when the charge is ended before having reached the end of normal charging.

Estimated total cycles: An estimation of the total quantity of cycles including any opportunity charging that may have occurred.

Lifetime average cycles per day: This is the average number of cycles per day since the eGO!c was installed.

Last 30 days average cycles per day: The average number of cycles per day for the last 30 days.

Total connected days: How many days the eGO!c has been connected to the battery.

Number of connections: The number of times the eGO!c has been disconnected and reconnected.

Days since last connection: Number of days since the last time the eGO!c was connected.

Lifetime work hours: The number of hours of discharge, recorded from the first time the eGO!c was installed.

Lifetime rest hours: The number of hours the battery is not on charge or being discharged, recorded from the first time the eGO!c was installed.

Last cycle complete hours between charges: The number of hours between the end of the last charge and the beginning of the next charge.

Last cycle work time: The number of hours the battery is being discharged during the last cycle.

Last cycle rest time: The number of hours the battery is not being discharged during the last cycle.

Last cycle charge time: The number of hours during which the battery is on charge during the last cycle.

Maximum temperature during last cycle: Highest recorded temperature during last cycle.

Maximum voltage during last cycle: Highest recorded voltage during last cycle.

Minimum voltage during last cycle: Lowest recorded voltage during last cycle.

Lifetime average temperature: The average temperature recorded since the first installation of the eGO!c.

Lifetime max temperature: Highest recorded temperature since the eGO!c was installed.

Days since connection when maximum temp occurred: The number of days between the initial installation up until the highest temperature was recorded.

Last 30 days average temperature: The average temperature recorded for the preceding 30 days.

Last 24 hours average temperature: The average temperature recorded for the preceding 24 hours.

Cumulative hours of high temperature: The number of hours where the temperature exceeds 40 degrees Celsius (flooded) and 37 degrees Celsius (VRLA).

Lifetime max voltage: The highest voltage recorded since the eGO!c was first installed.

Days since connection when maximum voltage occurred: The number of days between the initial installation up until the day the maximum voltage occurred.

Lifetime minimum voltage: The lowest voltage recorded since the eGO!c was first installed.

Days since connection when minimum voltage occurred: The number of days between the initial installation up until the day the minimum voltage occurred.

Hours of over discharge: The number of hours that the average cell voltage is below the pre-defined voltage.

Total number of days without water: The number of days the electrolyte level is below the level of the SmartBlinky probe.

Longest period without water: The longest period in days that the electrolyte level has been below the level of the SmartBlinky probe.

Days without water at download: The number of days the electrolyte level is below the level of the SmartBlinky probe at the time of download.

DATA YOU CAN USE

The data points we record are translated by the website into metrics that are easy to understand and can be used to make the changes in process needed to maximie battery performance.



Electrolyte Levels

Our eGO! products feature our industry standard SmartBlinky Technology alerting you when the battery needs water.



Temperature Levels

Hot running or charging temperatures are a telltale sign that something is wrong. Our eGO! will alert you to it.



Data Received

If we don't get the data you don't get the information. We can track exactly when we last received an upload online.



Normal Cycles

When a battery is charged, used and discharged, this is classed as a normal usage cycle.



Opportunity Cycles

If a battery is charged multiple times during a work cycle this reduces overall life expectancy.



Abuse Cycles

Abuse cycles are another big killer of batteries. We track it so you can amend working practices and maintenance.



Work Time

You can see exactly how long each battery has worked for, hoping you to streamline assets.



Rest Time

Reporting in conjunction with Work Time, this shows how long a battery has stood unused with charge.



Charge Time

The amount of time a battery has been on charge can indicate a whole range of issues with capacity.



Cool Down Time

Using a battery that hasn't cooled down enough drastically impacts performance, we track it so you can change practices.



Life Used

Calculating the average lifespan of a battery using the data captured through the eGO! we can show current life used.



Life Remaining

Working in with Life Used, the life remaining report allows you to effectively plan in replacing batteries and assets.

DOC0442 © 2020 Philadelphia Scientific UK Ltd. All Rights Reserved. Philadelphia Scientific and the PS logo are registered trademarks of Philadelphia Scientific LLC. eGO! and eGO!c are trademarks of Philadelphia Scientific UK Ltd. E&O.E.



WWW.PHLSCI.COM

Philadelphia Scientific LLC
P: +1 (215) 616 0390
E: info@phlsci.com

Philadelphia Scientific EMEA
P: +44 (0) 1204 467777
E: info@ps-europe.net

Philadelphia Scientific ASIA PACIFIC
P: +61 (2) 8004 2447
E: info@phlsci.com.au

