




**TECHNICAL SPECIFICATIONS - LVA: LOW VOLTAGE ALERT**

SPECIFICATION	
Operating voltage	24-80V Nominal (72V Excluded)
Nominal Current	5-20mA
LED Indications	Green: OK Yellow (Centre): Charge Soon Red (Edge) + Yellow (Centre): Charge Now
Reverse Polarity Protection	Yes
Over-discharge Threshold	80%
Connections	(Q) FlexiTap
Fuses	125mA (FlexiTap)
Warranty	1 Year
Flame Retardant	UL-VB
FlexiTap Connection	ACC-LVA-Q
Cable Colour(s)	Black (-), Black (+)
Cable Length(s)	(-) 645mm (+) 645mm
Dimensions	
Length	44mm
Width	44mm
Height	18mm
Weight	42g

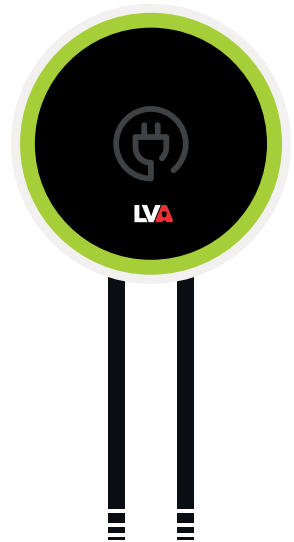

DOC0452 © 2021 Philadelphia Scientific UK Ltd. All Rights Reserved. Philadelphia Scientific and the PS logo are registered trademarks of Philadelphia Scientific. Low Voltage Alert and LVA are trademarks of Philadelphia Scientific (U.K) Limited. E&OE