


 Philadelphia Scientific® **Model-S Watering Gun**

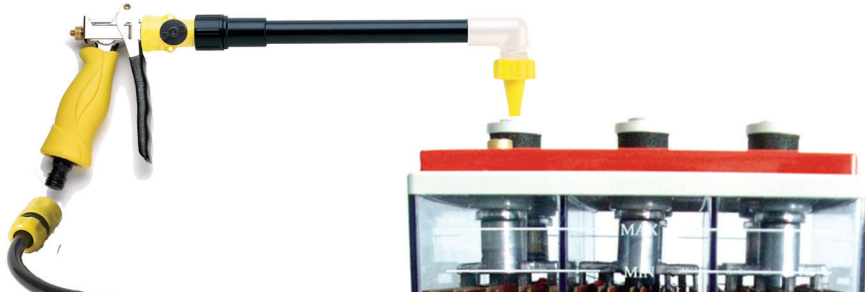

Installation:

- Attach the quick-connect to your supply hose.
- If the static water pressure is greater than 75 PSI (5.2 bar), a pressure reducer must be installed. Part number PS-PR.
- Click the Watering Gun on to the fitting.
- Turn on the water.

Operation:

- Place the Nozzle in the flame arrestor vent, so that the end of the nozzle lines up with the hole.
- Squeeze the trigger to allow the gun to dispense water.
- If the flow is too fast, reduce the flow with the adjustable flow throttle.
- Stop filling when the level is visible correct.

Note: The product is not intended for use with acid.



Philadelphia Scientific LLC

207 Progress Drive, Montgomeryville, PA 18936 USA


P: 215.616.0390 F: 215.616.0500

web: www.phlsci.com

PAK120
04/2015

© 2015 Philadelphia Scientific LLC. All Rights Reserved. Philadelphia Scientific and the PS logo are registered trademarks of Philadelphia Scientific LLC. E&O.E.

 Philadelphia Scientific® **Model-S Watering Gun**

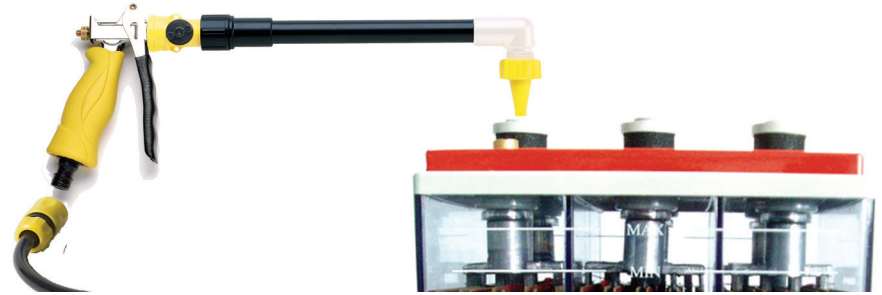

Installation:

- Attach the quick-connect to your supply hose.
- If the static water pressure is greater than 75 PSI (5.2 bar), a pressure reducer must be installed. Part number PS-PR.
- Click the Watering Gun on to the fitting.
- Turn on the water.

Operation:

- Place the Nozzle in the flame arrestor vent, so that the end of the nozzle lines up with the hole.
- Squeeze the trigger to allow the gun to dispense water.
- If the flow is too fast, reduce the flow with the adjustable flow throttle.
- Stop filling when the level is visible correct.

Note: The product is not intended for use with acid.



Philadelphia Scientific LLC

207 Progress Drive, Montgomeryville, PA 18936 USA

P: 215.616.0390 F: 215.616.0500

web: www.phlsci.com

PAK120
04/2015

© 2015 Philadelphia Scientific LLC. All Rights Reserved. Philadelphia Scientific and the PS logo are registered trademarks of Philadelphia Scientific LLC. E&O.E.